



FULL SIZE SERIES Rough Terrain SCISSOR LIFTS

Skyjack's Full-Size Series Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities— all in one package!

The SJ 8831 and SJ 8841 feature working heights of 11,4 m and 12,5 m respectively. Both models are drivable at full height, with capacities ranging to 909 kg allowing for maximized productivity.

As with every Skyjack model, these units use an analog based control system, featuring Skyjack's standard colour coded and numbered wiring, for ease of troubleshooting.



Unit A12/A13
Kenyon Court
Walter Leigh Way
Moss Industrial Estate
Leigh, WN7 3PT



0800 085 3709 

info@aerialplatforms.co.uk 

Rough Terrain Scissor Lifts

STANDARD FEATURES


- Axle based 4WD
- "No Spin" rear differential and limited slip front different
- Disc brake system on rear axle
- 29hp Kubota Diesel engine on roll out tray
- Independent/auto leveling outriggers
- Self-centering scissor design
- Dual 1,2 m roll out extension decks
- Analog control system
- Colour coded and numbered wiring system
- 30% Gradeability
- Grip lug, foam-filled tires
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- Overload sensing system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on sides
- Lanyard attachment points
- Scissor guards
- Tie down/lift lugs

OPTIONS†

- Dual 1,2 m powered extension decks
- Diesel scrubber
- Shop airline to platform
- 3.5kW hydraulic generator
- Full height spring hinged gates
- Non-marking grip lug foam-filled tyres
- All motion audible alarm

† Capacities, and machine weights may differ when options are added

Specifications	SJ 8831	SJ 8841
A Work Height	11,4 m	14,5 m
B Raised Platform Height	9,4 m	12,5 m
C Lowered Platform Height	1,5 m	1,8 m
D Overall Width	2,2 m	2,2 m
E Overall Length	3,5 m	3,5 m
F Stowed Height (Rails Up)	2,7 m	2,9 m
G Stowed Height (Rails Down)	2,0 m	2,2 m
H Platform Width (Inside Dimension)	1,7 m	1,7 m
Platform Length Stowed (Inside Dimension)	3,4 m	3,4 m
I Platform Length Extended (Inside Dimension)	5,7 m	5,7 m
Ground Clearance	0,2 m	0,2 m
Weight	5684 kg	6173 kg
Gradeability	30%	30%
Turning Radius (Inside)	2,9 m	2,9 m
Turning Radius (Outside)	6,3 m	6,3 m
Lift Time (With Rated Load)	52 sec	56 sec
Drive Speed (Stowed)	4,5 km/h	4,5 km/h
Drive Speed (Raised)	0,8 km/h	0,34 km/h
Maximum Drive Height	Full	Full
Capacity (Overall)	909 kg	681 kg
Maximum # of Persons	6	5

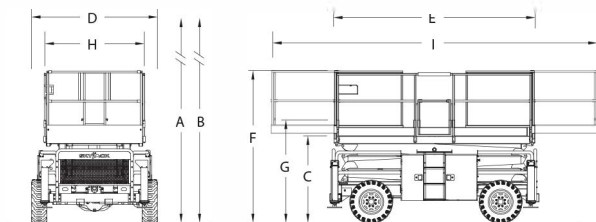

Model	Capacity With 1 Extension Deck*		Capacity With 2 Extension Decks*		
	Main	Front Ext.	Main	Front Ext.	Rear Ext.
SJ 8831	680 kg	227 kg	317 kg	227 kg	227 kg
SJ 8841	227 kg	227 kg	227 kg	227 kg	227 kg

Skyjack UK
 Unit 1, Maes-y-Clawdd
 Maesbury Road Industrial Estate
 Oswestry, Shropshire, SY10 8NN
 Tel: +44 1691 676235
 Fax: +44 1691 676239
 Email: info@skyjackeurope.co.uk

www.skyjack.com

Skyjack AB (Sweden)
 Marieholmmsgatan 2
 415 02 Göteborg
 Sweden
 Tel: +46 31212245
 Fax: +46 31212066

Skyjack SAS (France)
 Lieudit Les Pretes
 22 bis rue de l'avenir
 38150 Chanas France
 Tel: +33 474 20 30 20
 Fax: +33 474 20 58 93

Skyjack Hebebühnen GmbH (Germany)
 Wullener Feld 27
 D-58454 Witten
 Tel: +49 2302 2026909
 Fax: +49 2302 2025671

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standards and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. CE marked work platforms are in conformance to Machinery Directive 2006/42/EC.



Printed In Canada 03/10



Unit A12/A13
 Kenyon Court
 Walter Leigh Way
 Moss Industrial Estate
 Leigh, WN7 3PT



0800 085 3709



info@aerialplatforms.co.uk

