

Specifications

| Models | GS-2032 | | GS-2632 | | GS-3232 | |
|---|---------|-------------|---------|-------------|---------|-------------|
| Measurements | Metric | US | Metric | US | Metric | US |
| Working height maximum* | 7.90 m | 25 ft 11 in | 9.93 m | 32 ft | 11.75 m | 38 ft |
| A Platform height maximum w/load sense | 5.90 m | 19 ft 5 in | 7.93 m | 26 ft | 9.75 m | 32 ft |
| B Platform height stowed | 1.03 m | 3 ft 5 in | 1.16 m | 3 ft 10 in | 1.29 m | 4 ft 3 in |
| C Platform length -outside | 2.26 m | 7 ft 5 in | 2.26 m | 7 ft 5 in | 2.26 m | 7 ft 5 in |
| extended | 3.18 m | 10 ft 5 in | 3.18 m | 10 ft 5 in | 3.18 m | 10 ft 5 in |
| Slide-out platform extension deck | 91 cm | 3 ft | 91 cm | 3 ft | 91 cm | 3 ft |
| D Platform width - outside | 81 cm | 2 ft 8 in | 81 cm | 2 ft 8 in | 81 cm | 2 ft 8 in |
| Guardrail height | 1.10 m | 3 ft 7 in | 1.10 m | 3 ft 7 in | 1.10 m | 3 ft 7 in |
| Toeboard height | 15 cm | 6 in | 15 cm | 6 in | 15 cm | 6 in |
| E Height - stowed: folding guardrails | 2.13 m | 7 ft | 2.26 m | 7 ft 5 in | 2.39 m | 7 ft 10 in |
| rails folded | 1.78 m | 5 ft 9 in | 1.91 m | 6 ft 3 in | 2.03 m | 6 ft 8 in |
| Length - stowed | 2.44 m | 8 ft | 2.44 m | 8 ft | 2.44 m | 8 ft |
| F Length - extended | 3.33 m | 10 ft 11 in | 3.33 m | 10 ft 11 in | 3.33 m | 10 ft 11 in |
| G Width | 81 cm | 2 ft 8 in | 81 cm | 2 ft 8 in | 81 cm | 2 ft 8 in |
| H Wheelbase | 1.85 m | 6 ft 1 in | 1.85 m | 6 ft 1 in | 1.85 m | 6 ft 1 in |
| I Ground clearance - center | 9 cm | 3.5 in | 9 cm | 3.5 in | 9 cm | 3.5 in |
| J - with pothole guards deployed | 2 cm | 0.88 in | 2 cm | 0.88 in | 2 cm | 0.88 in |

Productivity

| | | | | | | |
|--|------------------|-------------|------------------|-------------|------------------|-------------|
| Maximum platform occupancy (in/out) | 2/1 | 2/1 | 2/- | 2/- | 2/- | 2/- |
| Lift capacity | 363 kg | 800 lbs | 227 kg | 500 lbs | 227 kg | 500 lbs |
| Lift capacity - extension deck | 113 kg | 250 lb | 113 kg | 250 lb | 113 kg | 250 lb |
| Drive height | full height | | full height | | 6.71 m | 22 ft |
| Drive speed - stowed | 3.5 km/h | 2.2 mph | 3.5 km/h | 2.2 mph | 3.5 km/h | 2.2 mph |
| Drive speed - raised | 0.8 km/h | 0.5 mph | 0.8 km/h | 0.5 mph | 0.8 km/h | 0.5 mph |
| Gradeability - stowed** | 30% | | 25% | | 25% | |
| Max outrigger levelling: front to back | ----- | ----- | ----- | ----- | 3° | |
| Max outrigger levelling: side to side | ----- | ----- | ----- | ----- | 5° | |
| Turning radius - inside | zero | zero | zero | zero | zero | zero |
| Turning radius - outside | 2.13 m | 7 ft | 2.13 m | 7 ft | 2.13 m | 7 ft |
| Raise / lower speed | 28 / 24 sec | 28 / 24 sec | 28 / 24 sec | 28 / 24 sec | 55 / 28 sec | 55 / 28 sec |
| Controls | proportional | | proportional | | proportional | |
| Drive | dual front wheel | | dual front wheel | | dual front wheel | |
| Multiple disc brakes | dual rear wheel | | dual rear wheel | | dual rear wheel | |
| Tyres - solid non-marking | 38x13x28 cm | 15x5x11 in | 38x13x28 cm | 15x5x11 in | 38x13x28 cm | 15x5x11 in |

Power


| | | | | |
|---------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| Power source | 24 V DC (four 6V 225 Ah batteries) | 24 V DC (four 6V 225 Ah batteries) | 24 V DC (four 6V 225 Ah batteries) | 24 V DC (four 6V 225 Ah batteries) |
| Hydraulic system capacity | 17 L | 4.5 gal | 17 L | 4.5 gal |

Sound & Vibration Levels

| | | | | | | |
|---|-----------------------|---------------------------|-----------------------|---------------------------|-----------------------|---------------------------|
| Sound pressure level (ground workstation) | <70 dBA | <70 dBA | <70 dBA | <70 dBA | <70 dBA | <70 dBA |
| Sound pressure level (platform workstation) | <70 dBA | <70 dBA | <70 dBA | <70 dBA | <70 dBA | <70 dBA |
| Vibration | <2.5 m/s ² | <8 ft 2 in/s ² | <2.5 m/s ² | <8 ft 2 in/s ² | <2.5 m/s ² | <8 ft 2 in/s ² |

Weight***

| | | | | | |
|----------|-----------|----------|-----------|----------|-----------|
| 2,012 kg | 4,435 lbs | 1,956 kg | 4,313 lbs | 2,352 kg | 5,185 lbs |
|----------|-----------|----------|-----------|----------|-----------|

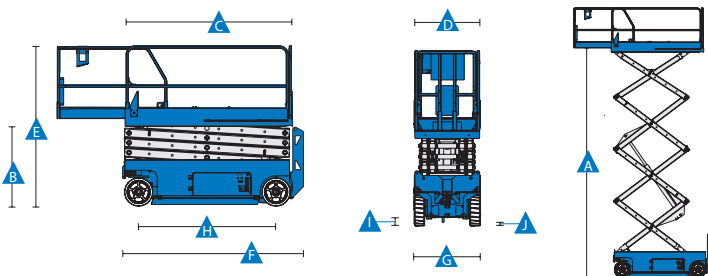

¹ Indoor use only for the GS-2632 and GS-3232
 * The metric equivalent of working height adds 2 m to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 ***Weight will vary depending on options and/or country standards.

Features

| Standard Features | Easily Configured To Meet Your Needs | Options & Accessories |
|-------------------|--------------------------------------|-----------------------|
|-------------------|--------------------------------------|-----------------------|

Measurements

- GS-2032
- 7.90 m (25 ft 11 in) working height
 - Up to 363 kg (800 lbs) lift capacity
- GS-2632
- 9.93 m (32 ft) working height
 - Up to 227 kg (500 lbs) lift capacity
- GS-3232
- 11.75 m (38 ft) working height
 - Up to 227 kg (500 lbs) lift capacity

Productivity

- Folding rails with half-height swing gate
- Smart Link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics)
- Rear recessed charger receptacle
- Platform control with battery charge indicator
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual hydraulic brake release
- Swing-out component trays
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing LED beacons
- Electronic horn
- Hour meter
- Telematics-Ready Connector

Power

- 24 V DC battery pack
- Universal 20 amp smart charger

Platform

- 2.26 x 0.81 m (7 ft 5 in x 2 ft 8 in) steel platform
- 0.91 m (3 ft) extension deck

Power

- 24 V DC (four 6 V 225 Ah batteries)

Outriggers

- Automatic levelling outriggers (on GS-3232 only, standard)
- No outriggers

Drive

- Dual front wheel drive

Tyres

- Solid non-marking

Productivity Options

- Air line to platform
- Power to platform: plug, socket, with optional Residual-current Circuit Breaker with Overcurrent protection
- Biodegradable hydraulic oil
- Track & Trace⁽¹⁾ (GPS unit providing machine location & operating information)
- Motion alarm package
- Automotive horn

Power Options

- Maintenance-free batteries
- Low temperature cut-out module



⁽¹⁾ Includes a first 2 years subscription