

# A38E

## ELECTRIC ARTICULATED BOOM LIFT



- Popular electric articulated boom lift
- Lightweight, durable and reliable
- Smooth, easy to use controls
- Compact chassis for excellent manoeuvrability
- Suitable for indoor and outdoor use



**0800 085 3709**  
**WWW.AERIALPLATFORMS.CO.UK**

Aerial Platforms Ltd, Denebrook Court, Greenfold Way, Leigh, WN7 3XJ

**HIRE NOW!**

DIMENSIONS		A38E
Max. working height		13.5m
Max. platform height ( A )		11.5m
Max. working outreach		6.1m
Clearance height at max. outreach		5.4m
Platform size ( E x F )		0.69m x 1.11m
Overall width ( B )		1.5m
Overall length ( C )		4.1m
Stowed height ( D )		2.0m
Ground clearance		120mm

PERFORMANCE	
Platform capacity (SWL)	215kg
Max. drive height	11.5m
Max. wind speed	12.5m/s
Max. drive speed (stowed)	4.0km/h
Max. drive speed (elevated)	0.65km/h
Platform rotation	90° (+45°/-45°)
Turret rotation (non-continuous)	360°
Tailswing (riser boom elevated)	0m
Tailswing (riser boom stowed)	1.4m
Raise/lower time	83/68 sec
Gradeability	36%
Inside turning radius	1.12m
Outside turning radius	2.4m
Tyres	22 x 9 16 non-marking rubber
Controls	proportional
Drive system	direct drive DC


#### POWER

Power source	8 x 6V, 220Ah batteries
--------------	-------------------------


#### WEIGHT

Weight	3,880kg
--------	---------

#### WORKING ENVELOPE

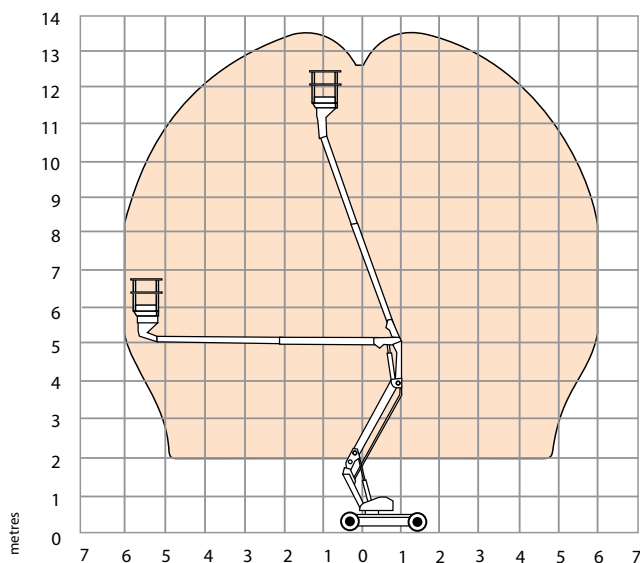

CE Specification  
© Snorkel 2019

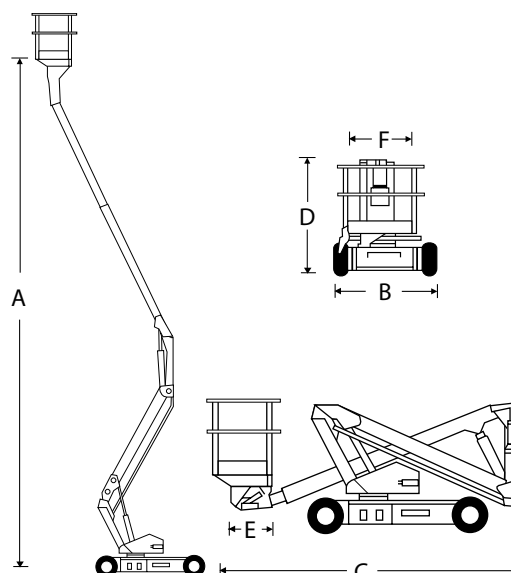

#### STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- Proportional one-handed controls
- Hydraulic platform rotation
- Minimal front boom overhang
- Ultra-tight inside turning radius
- Power line to platform
- Tilt alarm and cut-out
- 2 person + equipment capacity indoor
- 1 person + equipment capacity outdoor
- Direct DC drive parallel wired wheel motors
- Non-marking tyres
- Duplicate boom controls at ground level
- Hour meter & on-board diagnostics display
- 2 year parts & labour, 5 year structural warranty
- CE approved

#### OPTIONS

- Special paint colours
- Flashing amber light
- Environmental hydraulic oil

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.