

# SJ6832 RT

## ROUGH TERRAIN SCISSORS



### STANDARD FEATURES

- SKYCODED™ Color coded and numbered wiring system
- Crossover symmetrical 4WD
- Drivable at full height with roll out deck fully extended
- 1.52 m Roll out extension deck
- Dual fuel (gas/propane) or diesel engine
- 90° swing out engine tray
- Multiple wet disc spring applied hydraulic release brakes
- 110V AC outlet on platform with GFI
- Up to 50% Gradeability
- Foam-filled low profile grip lug tires
- Tilt alarm with drive & lift cut-out
- Lanyard attachment points
- All motion audible alarm
- Operator horn
- Hinged railing system
- Forklift pockets and tie down/lift lugs
- Full height spring hinged gate at rear of unit
- Relay based control system
- Telematics ready
- 2 Year Gold Leaf Warranty (5 year structural warranty)

### OPTIONS

- Heavy duty pipe rack
- Tool caddy
- Diesel scrubber for tier 4 final engine
- Independent/auto leveling outriggers
- Flashing light
- 3.5 kW hydraulic generator
- Cold weather start package (Includes hydraulic oil tank heater, battery blanket, coolant or block heater)
- Positive air shut-off valve
- Shroud-style control box guard
- Bio oil
- Non destructive testing
- ELEVATE telematics
- Warranty options (3 or 5 year plans available)
- Secondary Guarding Lift Enable (SGLE)
- Non-marking grip lug foam-filled tires



**0800 085 3709**  
[WWW.AERIALPLATFORMS.CO.UK](http://WWW.AERIALPLATFORMS.CO.UK)



**HIRE NOW!**

Aerial Platforms Ltd, Denebrook Court, Greenfold Way, Leigh, WN7 3FZ

 PART OF THE CENTURION GROUP

# SJ6832 RT ROUGH TERRAIN SCISSORS

Dimensions	SJ6832 RT
<b>A</b> Work Height	11.75 m
<b>B</b> Raised Platform Height	9.75 m
<b>C</b> Lowered Platform Height	1.37 m
<b>D</b> Overall Width	1.76 m
<b>E</b> Overall Length	2.72 m
<b>F</b> Stowed Height (Rails Up)	2.51 m
<b>G</b> Stowed Height (Rails Down)	1.75 m
<b>H</b> Platform Width (Inside Dimension)	1.42 m
<b>I</b> Platform Length (Inside Dimension)	2.44 m
Specifications	SJ6832 RT
Extension Deck	1.52 m
Ground Clearance	0.20 m
Wheelbase	2.04 m
Weight	3,475 kg
Gradeability	40%
Turning Radius (Inside)	1.52 m
Turning Radius (Outside)	3.96 m
Lift Time (With Rated Load)	39 sec
Lower time (With Rated Load)	36 sec
Drive Speed (Stowed)	6.1 km/h
Drive Speed (Raised)	0.6 km/h
Maximum Drive Height	Full Height
Capacity (Overall)	454 kg
Distributed Capacity (Main Platform)	318 kg
Distributed Capacity (Extension Deck)	136 kg
Local Floor Load (With Rated Load)	1,500 kN/m <sup>2</sup>
Overall Floor Load (With Rated Load)	890 kg/m <sup>2</sup>
Maximum # of persons up to 12.5 m/s wind rating	4
Tire Type	Foam Filled
Tire Size	26 x 12

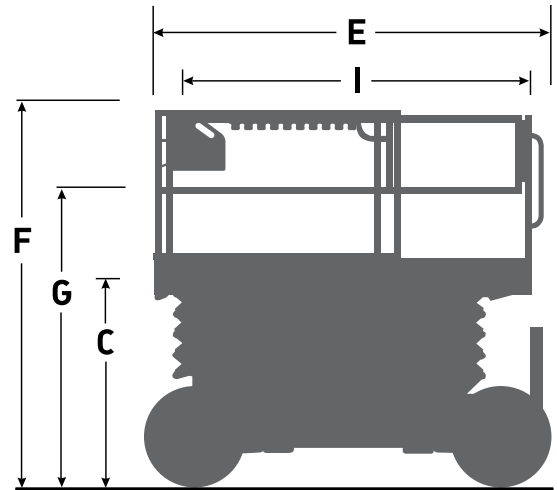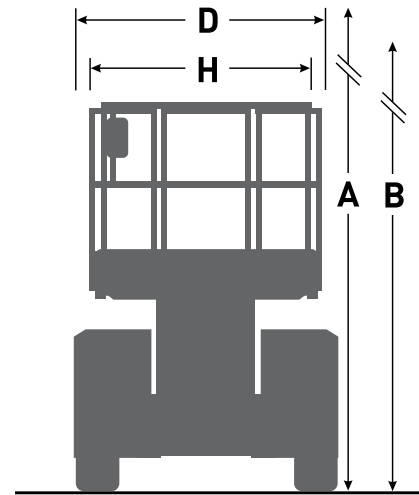

Skyjack Korea  
 720-1 Jaan-ri, Bibong-myeon,  
 Hwaseong-si, Gyeonggi-do,  
 South Korea  
 Tel: +82 31 500 4161  
 Fax: +82 31 500 4162



**0800 085 3709**  
[WWW.AERIALPLATFORMS.CO.UK](http://WWW.AERIALPLATFORMS.CO.UK)

**HIRE NOW!**

Aerial Platforms Ltd, Denebrook Court, Greenfold Way, Leigh, WN7 3FZ

PART OF THE CENTURION GROUP