

# SJ9664 RT

## ROUGH TERRAIN SCISSORS



### STANDARD FEATURES

- AXLDRIIVE™ Axle-based 4WD system
- Operator controlled locking rear differential and limited slip front differential
- Drivable up to 30' (9.14 m)
- 30% gradeability
- Wet disc SAHR brakes (rear axle)
- SKYCODED™ Color coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Kubota D1305 Tier 4F diesel engine
- Auto leveling outriggers
- Self-centering scissor design to support optional dual extension decks
- Lockable power disconnect switch
- Flashing light
- Proportional controls
- 1,130 lbs (513 kg) capacity
- Oversized platform with optimal clearance over side of machine
- Fold down hinged railing system
- Full height entry gates
- 5' (1.52 m) Roll-out extension deck
- High strength and impact resistant composite control box
- Overload sensing system
- 110V AC Outlet on platform with GFI
- Tilt alarm (4.5° x 2.5°) with drive and lift cut-out
- Single point emergency lowering
- Hourmeter
- Operator horn
- All motion alarm
- Tie down / lifting lugs
- Grip lug solid tires
- Telematics ready
- 2-Year Gold Leaf Warranty (5-year structural warranty)

### OPTIONS

- Kubota 31hp WG972 dual fuel engine
- Dual 5' (1.52 m) roll-out extension deck
- 3.5 kW Belt driven generator
- Welder ready package  
(Includes 7.5 kW hydraulic generator, hydraulic oil cooler, 3-phase power connection in platform)
- Diesel scrubber
- Positive air shut-off valve
- Cold weather start kit  
(Recommended for regions where average monthly low temperatures can reach 14°F / -10°C. Includes hydraulic oil tank heater, battery blanket, coolant or block heater)
- Arctic weather package  
(Recommended for regions where average monthly low temperatures can reach -0.4°F / -18°C. Includes cold weather start kit plus 60/40 coolant, arctic engine and gear oil)
- Heavy duty pipe rack
- Tool caddy
- Material handling stand
- Secondary Guarding Lift Enable (SGLE)
- Bio oil
- ELEVATE telematics
- Non-destructive testing
- Non-marking grip lug, solid tires
- Warranty options (3-year or 5-year plans available)



**0800 085 3709**  
[WWW.AERIALPLATFORMS.CO.UK](http://WWW.AERIALPLATFORMS.CO.UK)


**HIRE NOW!**

Aerial Platforms Ltd, Denebrook Court, Greenfold Way, Leigh, WN7 3FZ

 PART OF THE CENTURION GROUP

# SJ9664 RT ROUGH TERRAIN SCISSORS

Dimensions	SJ9664 RT
<b>A</b> Work Height	70' (21.34 m)
<b>B</b> Raised Platform Height	64' (19.51 m)
<b>C</b> Lowered Platform Height	96.5" (2.45 m)
<b>D</b> Overall Width	96" (2.44 m)
<b>E</b> Overall Length	180" (4.57 m)
<b>F</b> Stowed Height (Rails Up)	142" (3.61 m)
<b>G</b> Stowed Height (Rails Down)	109" (2.77 m)
<b>H</b> Platform Width (Inside Dimension)	75" (1.90 m)
<b>I</b> Platform Length (Inside Dimension)	171.7" (4.36 m)
<b>J</b> Platform Length (Single deck Extended)	231" (5.87 m)
<b>K</b> Platform Length (Dual deck Extended)	284" (7.21 m)
Specifications	SJ9664 RT
Extension Deck (Roll Out)	5' (1.52 m)
Ground Clearance	10" (26 cm)
Wheelbase	119" (3.02 m)
Weight	21,495 lbs (9,750 kg)
Gradeability	30%
Turning Radius (Inside)	131" (3.33 m)
Lift Time (With Rated Load)	86 sec
Lower time (With Rated Load)	70 sec
Drive Speed (Stowed)	3.0 mph (4.8 km/h)
Drive Speed (Raised)	0.5 mph (0.80 km/h)
Maximum Drive Height	30' (9.14 m)
Capacity (Overall)	1130 lbs (513 kg)
Main Platform (With 1 Extension Deck)	630 lbs (286 kg)
Front Extension Deck	500 lbs (227 kg)
Personnel Rating at Max Wind Rating	3
Hydraulic Reservoir	31 gal (116 L)
Diesel Engine	Kubota 24.8 HP D1305
Fuel Tank Capacity	13 gal. (49 L)
Tire Type	Solid
Tire Size	33 x 12-20

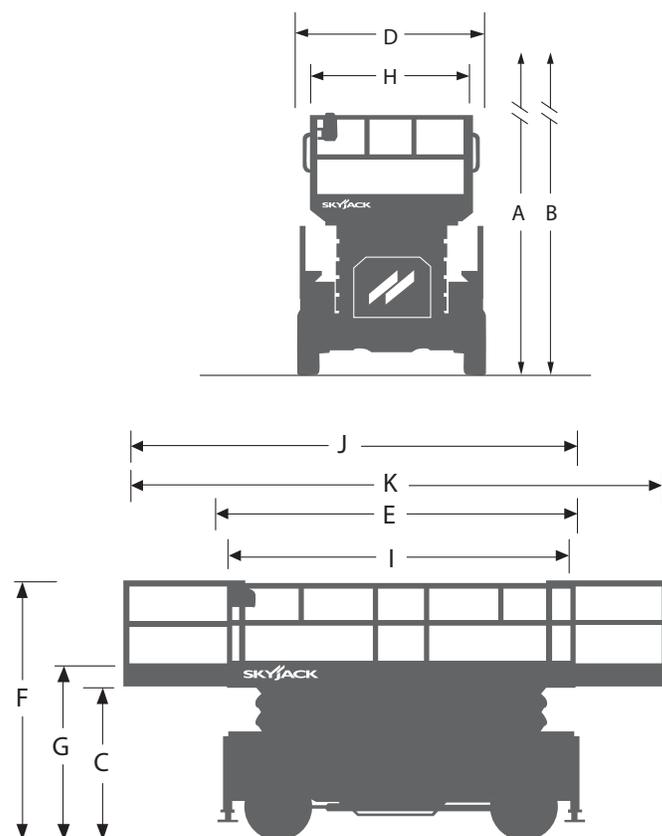

## Skyjack Head Office

55 Campbell Rd. Guelph, ON Canada N1H 1B9  
 Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)  
 Main Switchboard: 1-800-265-2738  
 Phone: 519-827-0888



**0800 085 3709**  
[WWW.AERIALPLATFORMS.CO.UK](http://WWW.AERIALPLATFORMS.CO.UK)

**HIRE NOW!**

Aerial Platforms Ltd, Denebrook Court, Greenfold Way, Leigh, WN7 3FZ

PART OF THE CENTURION GROUP