

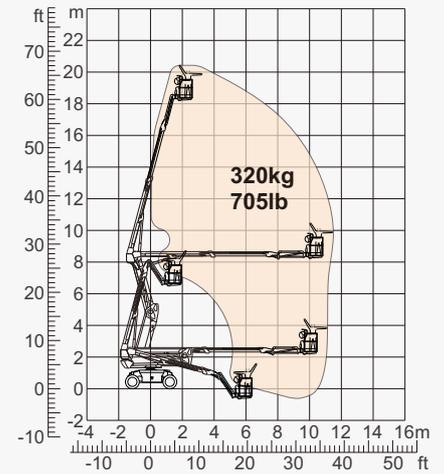


SPECIFICATIONS

| Dimension | Metric | British |
|--------------------------------------|-----------------------|-----------------------|
| Max. Working Height | 20.15 m | 66' 1" |
| Max. Platform Height | 18.15 m | 59' 6" |
| Max. Operating Range(+0.6m) | 11.13 m | 36' 6" |
| Max. Platform Range | 10.53 m | 34' 6" |
| Flatbed Transport Dimensions (L×W×H) | 6.41 × 2.44 × 2.59 m | 21' × 8' × 8' 6" |
| Standard Container Transport | All Applicable | All Applicable |
| Platform Size(Length ×Width) | 1.83 × 0.79 m | 6' × 2' 7" |
| Turntable Tailswing | 0.65 m | 2' 2" |
| Ground Clearance A | 0.31 m | 1' |
| Wheelbase B | 2.40 m | 7' 10" |
| Turning Radius(Inside/Outside) | 3 / 4.73 m | 9' 10" / 15' 6" |
| Tyres | 315/55D20 | 315/55D20 |
| Max. Up And Over Clearance | 8.18 m | 26' 10" |
| Max. Down Probing Depth | 1.25 m | 4' 1" |
| Performance | | |
| S.W.L | 320 kg | 705 lbs |
| Max. Occupants | 2 | 2 |
| Gradeability | 40% | 40% |
| Travel Speed(Stowed-Raised) | 6.0 - 1.1 km/h | 3.7 - 0.7 mph |
| Max. Working Slope(X/Y) | 5° / 5° | 5° / 5° |
| Turret Rotation | 360° Continuous | 360° Continuous |
| Platform Rotation | 180° | 180° |
| Jib Movement | 132° | 132° |
| Weight | | |
| Overall Weight | 8450 kg | 18629 lbs |
| Power | | |
| Lithium Battery | 80VDC / 67.5Ah | 80VDC / 67.5Ah |
| Emergency Power System | 12V | 12V |
| Diesel Engine | Kubota D1105 / 18.2kW | Kubota D1105 / 18.2kW |
| Diesel Tank | 115 L | 30 gal |
| Hydraulic Tank | 145 L | 38 gal |



Range Of Motion

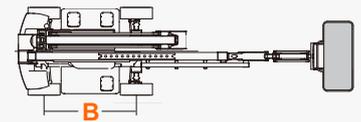

FEATURES

Standard Items

- 1.50m (4ft 11in) Jib
- Front Oscillating Axle
- Two-Wheel Steering
- Four-Wheel Drive
- Self-Leveling Platform
- 180° Left And Right Swing Platform
- Proportional Joystick Controls
- Thumb Rocker Steer
- Drive Enable
- Ac Power Cord To Platform
- Tilt Alarm
- Descent Alarm
- Flash
- Horn
- Hour Meter
- Integral Integrated Special Drive Axle
For Construction Machinery
- 360° Continuous Turntable Rotation
- Positive Traction Four Wheel Drive
- Platform Load Sense System
- Fault Diagnosis System
- Operator Anti-crushing Protection System
- Harsh Environment Kits
- 12V DC Auxiliary Power
- Kubota D1105 18kW 2600rpm Diesel Engine
- Hydraulic Oil Radiator
- Anti-restart Engine Protection
- Anti-reverse Engine Device
- Auto Engine Fault Shutdown



Articulated
Boom-BA



Working
Height-20m



Jib



MHEV-M



Rough
Terrain-RT



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

<https://en.cndingli.com>



0800 085 3709
WWW.AERIALPLATFORMS.CO.UK

HIRE NOW!

Aerial Platforms Ltd, Denebrook Court, Greenfold Way, Leigh, WN7 3FZ

PART OF THE CENTURION GROUP