


SPECIFICATIONS

Size	Metric	British
Max. Working Height A	5.05m	16ft 7in
Max. Platform Height B	3.05m	10ft
Overall Length C	1.33m	4ft 4in
Overall Width D	0.77m	2ft 6in
Overall Height E	1.60m	5ft 3in
Platform Size(Length×Width)	1.16m×0.57m	3ft 10in×1ft 10in
Ground Clearance(Stowed/Raised)	0.06m/0.016m	2in/1in
Wheelbase F	0.95m	3ft 1in
Turning Radius(Inside/Outside)	0.45m/1.20m	1ft 6in/3ft 11in
Tyres	φ200×80mm	φ200×80mm
Performance		
S.W.L	230kg	507lb
Max. Occupants(Indoor/Outdoor)	1/0	1/0
Gradeability	25%	25%
Travel Speed(Stowed)	4.0km/h	2.49mph
Travel Speed(Raised)	0.4km/h	0.25mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	20/20sec	20/20sec
Weight		
Overall Weight(Lead-acid Battery)	570kg	1256lb
Overall Weight(Lithium Battery)	540kg	1190lb
Power		
Lead-acid Battery	24V/55Ah	24V/55Ah
Lithium Battery	24V/63Ah	24V/63Ah
Charger	24V/15A	24V/15A
Driving Motor	2×24VDC/0.6kW	2×24VDC/0.6kW
Lifting Motor	24VDC/1.4kW	24VDC/1.4kW

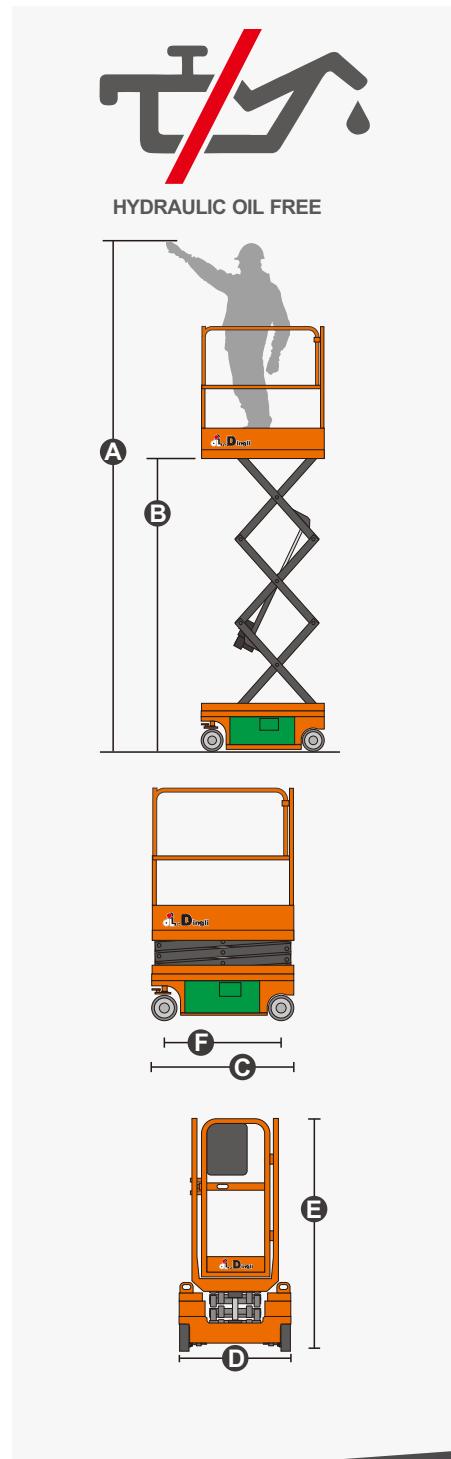

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

<https://en.cndingli.com>