

Model **530LRT ROUGH TERRAIN SCISSOR LIFTS**

ENHANCED SERVICEABILITY

• Pin base loading allows for no load calibration.

MORE PRODUCTIVE

- Enjoy superior terrainability with four-wheel-drive and standard oscillating axle.
- Enhanced proportional controls for more accurate machine operations.

MORE ACCESS

- More room for people and materials thanks to spacious deck with standard extension.
- Optional MegaDeck for bigger workspace.

SMART DESIGN

- Reduced soundlevels (perceived volume reduction by 34%).
- Relocated angle tilt sensor and re-routed harness are less prone to damages.
- Commonality of hood and ladder design on all LRTs for optimized fleet management.

Standard Features

- Four wheel drive
- Two speed drive selection · Proportional drive control with thumb
- steer
- Oscillating front axle
- 1.14 m manual front deck extension
- AC power cable to platform
- 1.81 m x 3.96 m steel platform (WxL) Moveable and removable platform
- console box
- On-board self-diagnostic testing

- · Fuel level warning light on the platform
- Fold down handrails Horn
- 3 degree tilt alarm and indicator light
- Engine distress warning/shut down system
- · Guardless system with audio visual alarm
- Swivel motor bracket
- Hydraulic leveling jacks

Standard Specifications

Power S	ource
---------	-------

- Diesel Engine
- Fuel Tank Capacity

Hydraulic System

Hydraulic reservoir

Tyres

129 L 12 x 16.5 Foam-Filled

21.7 kW

83 L

Accessories & Options

- 1.81 m x 7.05m Megadeck incl. dual
- manual extensions Dual deck extension
- · Platform Worklights
- 13 mm airline to platform
- Self-closing entrance doors
- Flashing Amber Beacon
- Skypower 7,500W generator package
- On-board 4,000W generator
- Night Bright[®] Package²
- Pipe Racks
- Euro plugs and sockets
- Platform Workstation

HIRE NOW!







Model **530LRT**ROUGH TERRAIN SCISSOR LIFTS


Performance

 Working Height A. Platform Height Lowered B. Platform Railing Height C. Stowed Height (rails folded) 	18.15 m 2.02 m 1.10 m 2.41 m
D. Platform Size	1.81 m x 3.96 m
Front Deck Extension	1.14 m
Rear Deck Extension	1.14 m
E. Overall Width	2.31 m
F. Overall Length	4.88 m
G. Wheelbase	2.97 m
 Platform Capacity (incl Dual extension) 	680 kg
 Capacity on Optional Deck Extension(s) 	230 kg (option)
Lift/Lower Time	65/60 seconds
 Maximum Drive Height 	9.75 m
 Maximum Weight¹ 	7,995 kg
 Maximum Ground Bearing Pressure 	6.7 kg/cm ²
Drive Speed 4WD	5.6 km/h
Gradeability 4WD	40%
Turning Radius	
inside	4.04 m
outside	6.02 m
Axle Oscillation	0.20 m



¹ Certain options or country standards may increase weight and/or dimensions

Dimensions

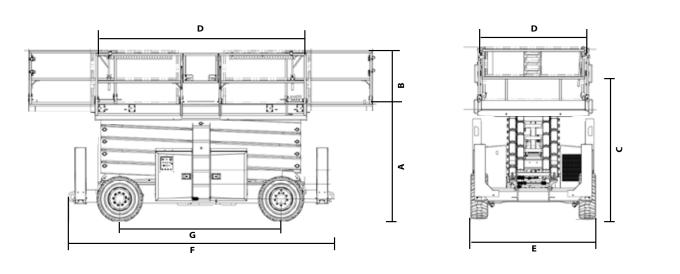





Aerial Platforms Ltd, Denebrook Court, Greenfold Way, Leigh, WN7 3XJ